
PURITY Finest

Water made for espresso

PURITY Finest optimised water, with its ideal mineral composition, releases the individual aromas in each espresso from the ground coffee and, therefore, supports the development of the authentic espresso taste.

Elements that negatively affect taste and aroma (such as chlorine) are removed. In addition, the water allows the perfect crema to develop in terms of colour and consistency.



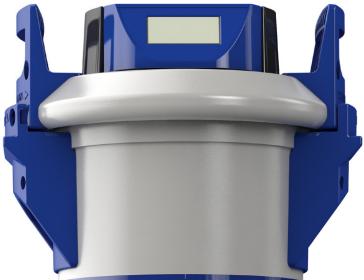



Environmental protection and recycling are part of the BRITA corporate philosophy. BRITA established a recycling programme for exhausted filter cartridges. Since 1992 all parts of BRITA cartridges can be completely reprocessed so that the materials can be recycled.

The benefits to you

- Optimised water for espresso preparation and optimum machine protection
- Unique, intensive espresso taste with full body and authentic aroma
- A thick, golden-brown crema that lasts
- Optimum results for all espresso based coffee specialities
- Reliable protection for professional coffee machines from limescale and gypsum deposits
- Reduction of elements that negatively affect aroma and taste



A fleece at the inlet reliably retains coarse particles and, with its laminar water distribution, ensures a high utilisation of the downstream filter medium.

2 Total hardness reduction


The filter medium reduces the total hardness and clearly reduces limescale and gypsum deposits.

3 Activated carbon filtration

All of the water runs through an activated carbon filter, so substances that have an adverse effect on the taste and aroma are removed.

4 Fine filtration

At the end of the filtration process another fleece retains fine particles.



The illustration serves as explanation of the filter technology. It is not to scale.

Quality and safety

Optimum water quality

Outstanding and consistent water quality - free of unwanted taste and aroma elements.

Maximum product safety

For uninterrupted operation and safe use.

Simple to use

Operation is simpler and easier than ever.

The food safety of BRITA Professional water filter products is tested and monitored by independent institutes. Electronic components are CE-certified and labelled.











*applies to all materials in contact with water

| PURITY Finest | 600 | 1200 | | | |
|--|-----------|--------|--|--|--|
| Technology | softening | | | | |
| Capacity ¹ at a total hardness of 10°dH (0% bypass setting ²) | 4,4001 | 8,1501 | | | |
| Comparable capacity according to DIN 18879-1:2007: The comparable capacity is a standardised indicator to facilitate comparison of different filters. The comparable capacity is determined under extreme conditions. Normally the usable capacity in practical operation is clearly higher than the comparable capacity and may vary greatly depending on the usage conditions. | | | | | |

| parable capacity is determined under extreme condition may vary greatly depending on the usage conditions. | s. Normally the usable capacity in practical operation | on is clearly higher than the comparable capacity and | |
|--|--|---|--|
| Comparable capacity | 3,038 l | 5,566 l | |
| Max. operating pressure | 6.9 bar | | |
| Water intake temperature | 4 - 30 °C | | |
| -1 1 11 4 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 | 070.1// | | |

| Water intake temperature | 4 − 30 °C | | |
|------------------------------------|--------------|------------|--|
| Flow rate with 1 bar pressure loss | max. 350 l/h | | |
| Nominal flow | 120 l/h | | |
| Pressure loss at nominal flow | 0.36 bar | 0.32 bar | |
| Dimensions (height/width) | 520/249 mm | 550/288 mm | |
| Weight (dry/wet) | 12/15 kg | 18/24 kg | |
| Connections (input/output) | G 1"/G 3/4" | | |
| Operating position | vertical | | |
| PURITY Finest | Order number | | |
| Replacement cartridge | 273205 | 273204 | |
| Accessories | Order number | | |

Appropriate hoses and hose sets from our comprehensive FlexConnect range as well as other accessories can be found in our price list.

| Replacement parts | Order number | | |
|--|---|--------|--|
| Pressure vessel lid with measuring and display unit | 272000 | 272400 | |
| Pressure vessel lid without measuring and display unit | 272100 | 272500 | |
| Explanatory notes | ¹ The capacities given have been tested and calculated on the basis of normal application and machine conditions. Due to external influences (e.g. variations in raw water quality and/or machine type), deviations from these results can occur. ² PURITY Finest cartridges must be operated with a bypass setting of 0%. | | |

Only drinking water quality may be used as the water supply for BRITA water filters.

For more information please contact:

BRITA Water Filter Systems Ltd.

BRITA FlowMeter 100-700

Total hardness test kit

BRITA House | 9 Granville Way | Bicester | OX26 4JT | United Kingdom

Tel.: +44 844 742-4990 | Fax: +44 186 936-5962 clientservices@brita.co.uk | www.brita.co.uk

BRITA Water Filter Systems Distributors Pty Ltd

Suite 2, Level 9, 123 Epping Road | Macquarie Park, NSW, 2113 | Australia

Tel.: +61 1300 955-021 | NZ: 0800 482-008 professional@brita.com.au | www.brita.com.au

Headquaters: BRITA GmbH

Heinrich-Hertz-Strasse 4 | 65232 Taunusstein | Germany Tel.: +49 6128 746-0 | Fax: +49 6128 746-5033

info@brita.net | www.brita.de



1033042

BRITA Professional Filter Service App

The new Filter Service App is your ideal assistant. This unique, comprehensive tool helps determine the right type and size of filter for your precise needs. It provides detailed installation guidance for service engineers, calculates when cartridges will need replacing – and has a wealth of other, innovative capabilities.

Download for free on





Or visit https://professional.brita.net/app